



Dresser Scarf

This matching dresser scarf and mirror set are sure to add style to your boudoir! The designs from OESD Licensed Crafters Collection 843 Butterfly Dreams add the perfect touch.

The instructions for the mirror can be found at your local dealer.

Designs are available in the following formats: CD-ROM with the formats .art, .pes, .pcs, .dst, .hus, .jef, .sew, .xxx, compatible with artista 200 CD Rom drive or the PC, USB Stick with the formats .art, .exp, .pes, .pcs, .dst, .hus, .jef, .sew, .xxx, 165-185 artista card, and Babylock/Brother and compatibles card.



SUPPLIES:

- OESD Licensed Crafters Collection 843 Butterfly Dreams by Deb Strain
- OESD Bobbin Thread
- Organ Embroidery Needles
- OESD Lightweight Tearaway Stabilizer
- OESD Ultra Clean and Tear Stabilizer
- Temporary Spray Adhesive
- 1/2 yard light-medium weight linen or cotton fabric (min.36" wide)
- Lightweight all-purpose sewing thread to match fabric
- Universal needle
- 100/16 wing needle
- Embroidery Machine
- Sewing Machine
- Basic sewing supplies

Dresser Scarf

Note: all marking is done with a washaway marking pen or pencil. Test on a fabric scrap to be sure markings can be removed.

DRESSER SCARF INSTRUCTIONS

1. Cut a 35" x 18" piece of fabric. Fold in half both vertically and horizontally and finger press the center lines. Using these lines as a guide, draw an 11" x 28" rectangle centered on the fabric. This rectangle will be the line of hemstitching on the finished scarf. **See Photo 01.**
2. Use Explorations Embroidery Software and select designs CC84333 and CC84336. Mirror image design CC84336. Line up the designs as shown in the photo. (The multi-hooping feature of your software is a useful tool when embroidering this large design. Alternatively, a hoop large enough to accommodate both designs could be used.) You can also use the software to print a template for properly locating the design on the fabric.
3. Refer to the photo of the finished scarf as a guide for placement and position the template(s), position your design(s) in a pleasing manner on the right-hand side of the scarf within the 11" x 28" rectangle. The bottom of the overall design should be approximately even with the lower edge of this rectangle. Draw center horizontal and vertical placement lines.
4. Adhere the wrong side of the fabric to 2 layers of OESD Ultra Clean & Tear Stabilizer together with temporary spray adhesive.
5. Hoop the three layers as one with the placement lines centered in the hoop. Embroider the design.
6. Remove from the hoop. Carefully tear away the stabilizer, one layer at a time, and press. (Repeat this and the previous two steps if two hoopings are required.)
7. If necessary, remark the 11" x 28" rectangle if the lines become distorted after the embroidery.
8. Draw another line located 1 1/4" outside the 11" x 28" rectangle. This will be the finished hem fold line. **See Photo 02.**
9. At this point, you may hem the dresser scarf with a conventional hem of your choice or you may use the following instructions to achieve the look of the scarf in the photo.
10. **Refer to Photo 03** and draw a straight line bisecting the corners of the rectangles (Line 1 in photo). This line should be at a 45 degree angle to the hem line. Draw another straight line at a 90 degree angle to Line 1 intersecting the corner of the outside rectangle and extending to both edges of the fabric (Line 2 in photo). Line 2 will be the stitching line.


Photo 1



Photo 2



Photo 3

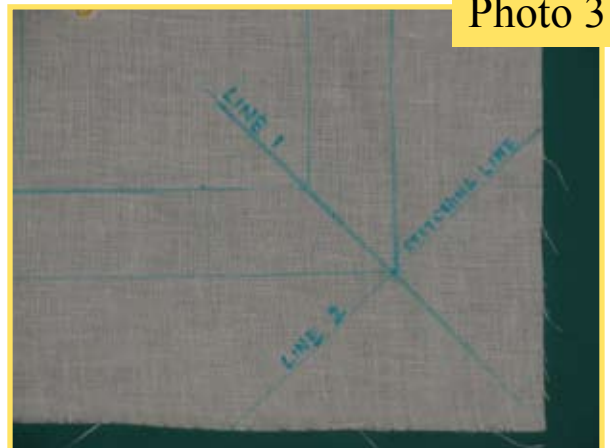

Dresser Scarf

11. With right sides together fold along Line 1. Using lightweight sewing thread, universal needle and a straight stitch, sew along Line 2 from the edge of the fabric to the corner. (If necessary, transfer the lines to the wrong side of the fabric.) **See Photo 04.**
12. Trim seam, clip corner (**See Photo 05**) and press seam open. Repeat for all four corners. Turn so that unfinished edge is on the wrong side and press hem along outside edge of rectangle. **See Photo 06.** (At this point there will be excess hem allowance which will be trimmed later.)
13. Adhere strips of OESD Lightweight Tear Away Stabilizer to the wrong side of the piece along the inside rectangle using a temporary spray adhesive.
14. On the right side, using a wing needle and lightweight sewing thread, stitch along the inside rectangle. An entredeux, daisy stitch or other stitch that penetrates the same hole several times will give the best results.
15. Carefully remove the stabilizer and from the wrong side, trim excess hem allowance close to the stitching. **See Photo 07.**
16. Remove all temporary marking and press.

Photo 4

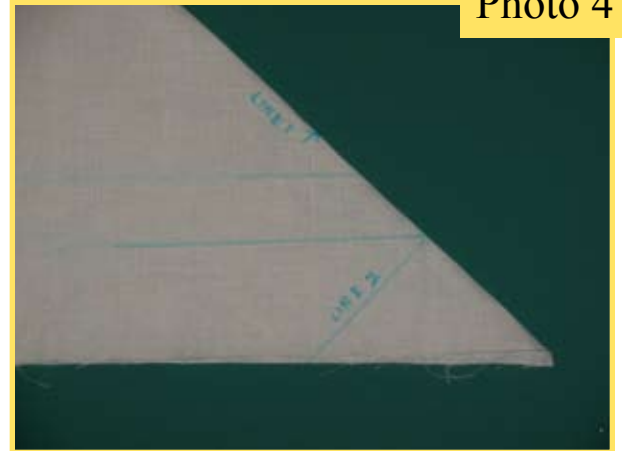


Photo 5

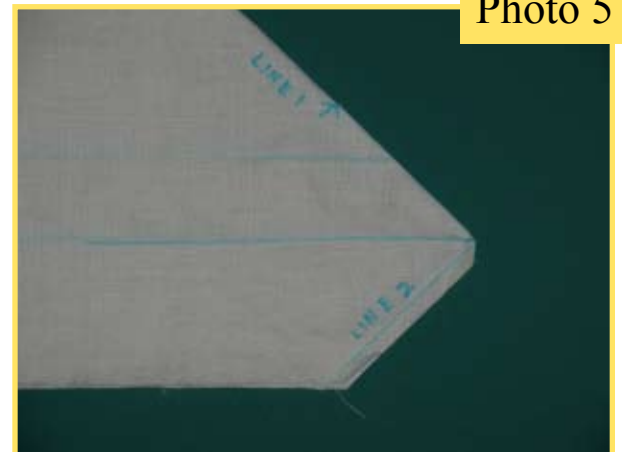


Photo 7



Photo 6

